

AcuSplitCT Series 200/250/300/400A

Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms
- All mounting accessories included

SPECIFICATIONS

Rated Primary current	200A, 250A, 300A, 400A
Rated Secondary current	5A, 1A
Burden	1.5VA
Accuracy	1%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR & CE approved, RoHS compliant

ORDERING INFORMATION

Ordering Number:	Rated Input		
AcuCT- 0812	-	-	-
Ordering Example:	AcuCT- 0812	-	200 - 5
	200: 200A	5: 5A	
	250: 250A	1: 1A	
	300: 300A		
	400: 400A		



Accuenergy Corp.

Los Angeles-Toronto-Beijing


North America Toll Free: 1-877-721-8908

Web: www.accuenergy.com

Email: marketing@accuenergy.com



DIMENSIONS

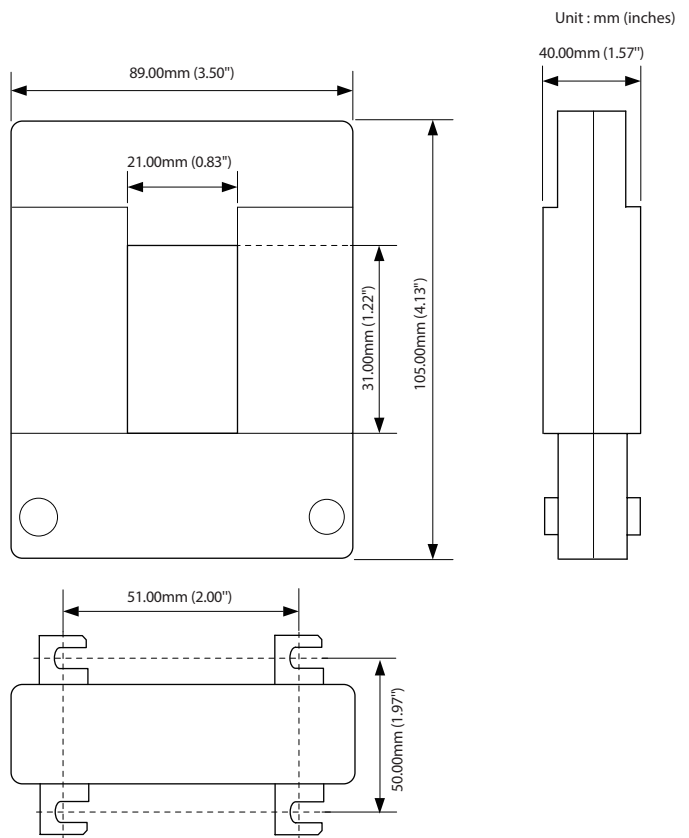

ACCUEENERGY
Your Power and Automation Partner

AcuSplitCT Series 400/600/800/1000A

Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

SPECIFICATIONS

Rated Primary Current	400A, 600A, 800A, 1000A
Rated Secondary Current	5A, 1A
Burden	2.5VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency Range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

ORDERING INFORMATION

	Rated Input	
Ordering Number: AcuCT- 2031	-	-
Ordering Example: AcuCT- 2031	- 600	- 5
	400: 400A	5: 5A
	600: 600A	1:1A
	800: 800A	
	1000: 1000A	




Accuenergy Corp.

Los Angeles-Toronto-Beijing


North America Toll Free: 1-877-721-8908

Web: www.accuenergy.com

Email: marketing@accuenergy.com

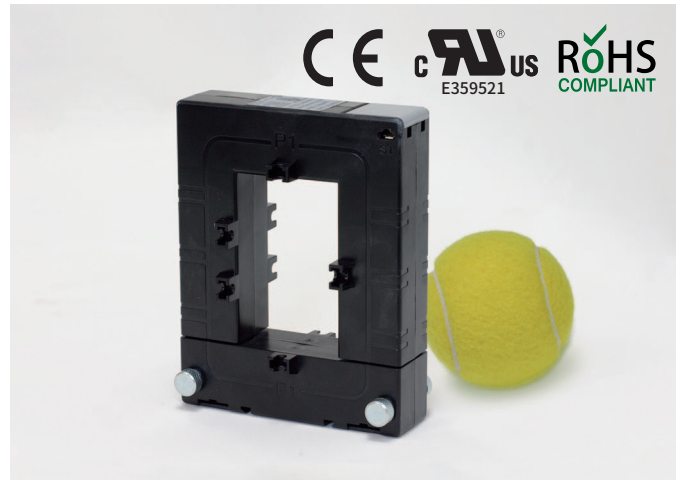

DIMENSIONS

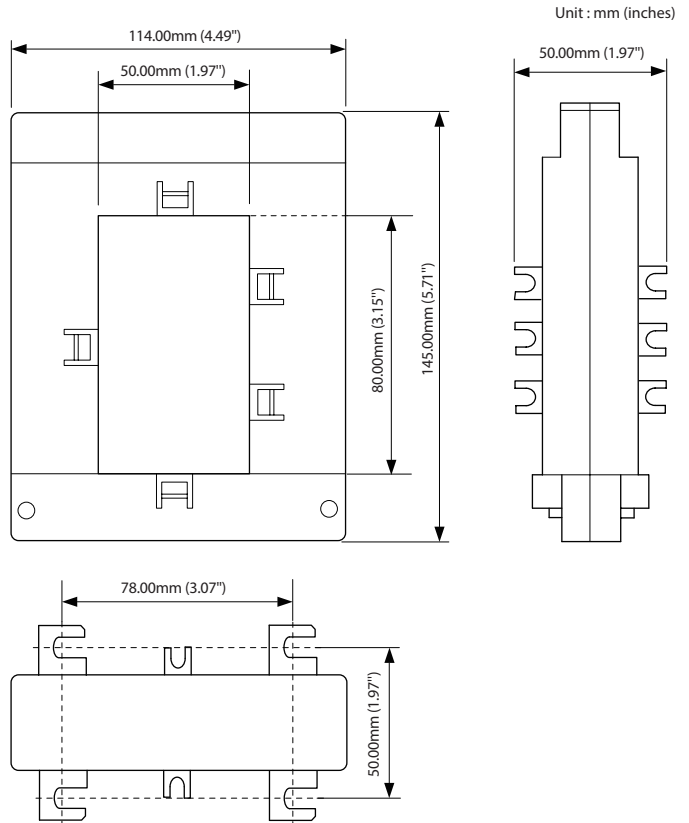

ACCUEENERGY
Your Power and Automation Partner

AcuSplitCT Series 1000/1200/1600A Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

SPECIFICATIONS

Rated Primary Current	1000A, 1200A, 1600A
Rated Secondary Current	5A, 1A
Burden	7.5VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

ORDERING INFORMATION

Ordering Number:	Rated Input		
AcuCT- 3147	-	-	-
Ordering Example: AcuCT- 3147	-	1600	- 5
	1000: 1000A	5: 5A	
	1200: 1200A	1:1A	
	1600: 1600A		



Accuenergy Corp.

Los Angeles-Toronto-Beijing


North America Toll Free: 1-877-721-8908

Web: www.accuenergy.com

Email: marketing@accuenergy.com



DIMENSIONS

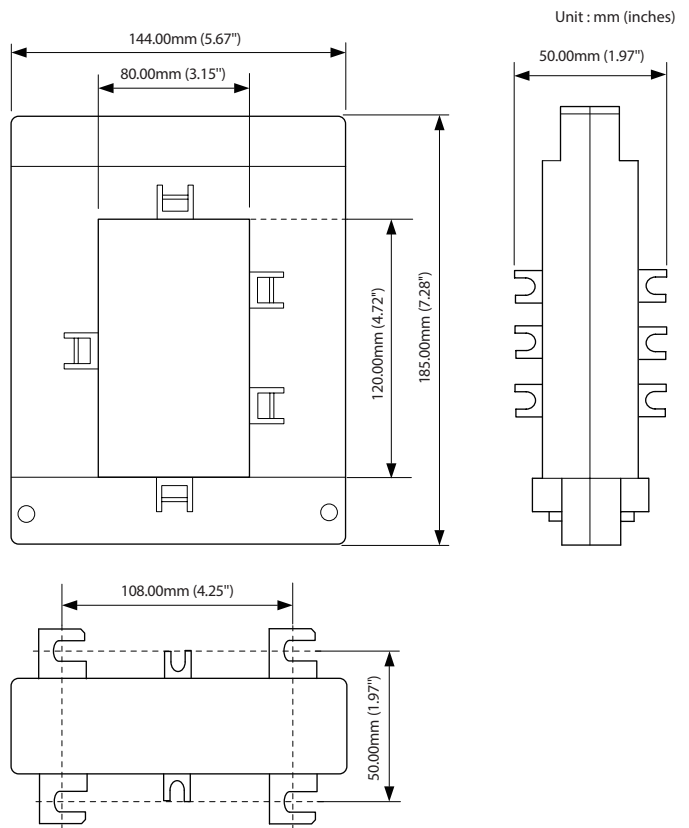

ACCUEENERGY
Your Power and Automation Partner

AcuSplitCT Series 2000/2500/3000/4000/5000A

Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

SPECIFICATIONS

Rated Primary current	2000, 2500, 3000, 4000, 5000A
Rated Secondary current	5A, 1A
Burden	15VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

ORDERING INFORMATION

Ordering Number:	AcuCT-	3163	-	Rated Input	-
Ordering Example:	AcuCT-	3163	-	2500	- 5
				2000: 2000A	5: 5A
				2500: 2500A	1: 1A
				3000: 3000A	
				4000: 4000A	
				5000: 5000A	



Accuenergy Corp.

Los Angeles-Toronto-Beijing


North America Toll Free: 1-877-721-8908

Web: www.accuenergy.com

Email: marketing@accuenergy.com



DIMENSIONS

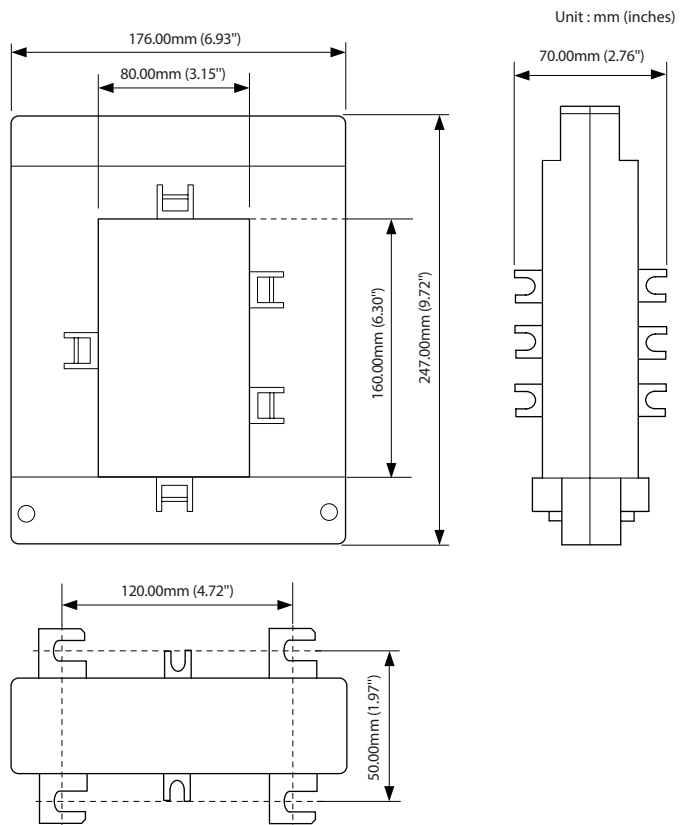

ACCUENERGY
Your Power and Automation Partner